

DirectIP™ 16-channel Decoder

DD-1116 NEW


- Supports DirectIP™ NVR
- Supports HDMI, VGA, CVBS port
- Up to 4ch FHD display
- Up to 16ch real-time display



SPECIFICATIONS

DECODER	
Video Compression	H.264
Video Input	16ch IP
Supported Devices	DirectIP NVR
Video Outputs	1 HDMI, 1 VGA, 1 CVBS
Display Resolution	HDMI , VGA : 1920x1200, 1920x1080, 1680x1050, 1600x1200 CVBS : 640x480
Display Speed	Up to 480ips
Max. Network Throughput	48Mbps
Network Connection	Gigabit Ethernet x1
GENERAL	
Dimensions (W x H x D)	200mm x 44mm x 153mm
Weight	0.84kg
PoE(class)	Yes(IEEE 802.3af Class 0)
Power Input	12VDC, PoE
Power Consumption	8W
Certifications	FCC ,CE

DIMENSIONS

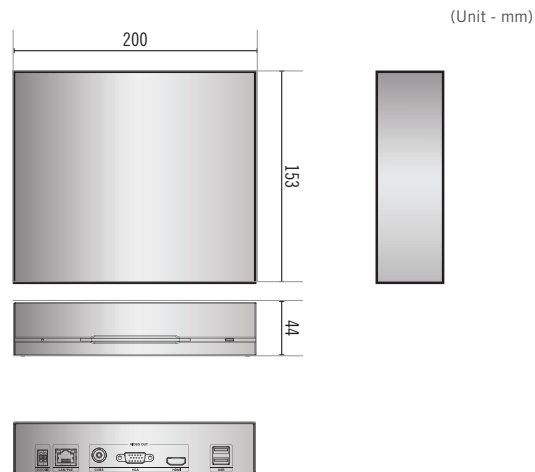

NVR

BOX

DOME

PTZ

BULLET

ZOOM

MONITOR

NETWORK ACCESSORIES

CAMERA ACCESSORIES

SOFTWARE

SOLUTION GUIDE

APPLICATIONS