

PM-32



LED 

Equipped with USB playback, DLNA compliance and built-in speakers, the compact PM-32 creates smooth content sharing experience for multimedia users in various indoor digital signage applications.

Designed for general multimedia applications, the PM-32 is built with the advanced technologies of DLNA compliance, USB playback and versatile connectivity. Media contents can be shared and managed via Ethernet cable within all DLNA compliant media devices in local network. Featuring Full HD resolution and an IPS panel, the 32" FHD public signage display ensures exceptional and accurate colour performance from all viewing angles. The RS-232 /RJ45 remote control allows easy digital signage installation and management. A built-in programmable scheduler enables automatic selective content playing and pre-set time turn-off. The Anti-Burn-in™ technology and Built-in Image Enhancer guarantee reliable operations in various indoor digital signage applications.

- > LED-Backlit technology with Full HD resolution
- > IPS panel for wide viewing angle
- > 11.9 mm (left/right/top) and 17.2 mm (bottom) slim bezel width
- > Anti-Burn-in™ technology
- > Built-in Image Enhancer: 3D Comb Filter/ Deinterlace/ Noise Reduction
- > USB playback function
- > DLNA compliance
- > Versatile connectivity: VGA, DVI, HDMI, Composite, Component
- > RS-232 in/out, RJ45 and IR in/out for remote control
- > Built-in scheduler allows different programme scheduling
- > Built-in speakers (10W x 2)
- > Ideal for 16/7 operations




PM-32

Specifications

PM-32

| | | |
|-----------------------------|---------------------------------|---|
| Panel | Panel Type | LED-Backlit TFT LCD (IPS panel) |
| | Panel Size | 31.5" |
| | Max. Resolution | 1920 x 1080 |
| | Brightness | 350 cd/m ² (Typical) |
| | Contrast Ratio | 1,400 : 1 (Typical) |
| | Viewing Angle (H/V) | 178°/178° |
| | Display Colour Response Time | 16.7M 4ms (GTG) |
| Frequency (H/V) | H.Freq | 31 kHz – 92 kHz |
| | V.Freq | 48 Hz – 85 Hz |
| Input | VGA | 15-Pin D-Sub |
| | DVI | 24-Pin DVI-D |
| | HDMI | HDMI |
| | Component | RCA x 3 |
| | CVBS | RCA (share with Component -Y) |
| External Control | RS-232 in/out | 2.5 mm jack |
| | LAN | RJ45 |
| | IR in/out | 3.5 mm phone Jack |
| Audio | Audio In | 1 x stereo audio in for PC (audio jack, 3.5 Ø) 1 x Stereo audio in (RCA) |
| | Audio Out Internal Speaker | 1 x Stereo audio out (RCA) 10W x 2 |
| Other Connectivity | USB Port | USB 2.0 |
| | Power | Power Supply Power Requirements Consumption |
| Operating Conditions | Temperature | 0°C ~ 40°C (41°F~104°F) |
| | Humidity | 20%~80% (No condensation) |
| Storage Conditions | Temperature | -20°C ~ 60°C (-4°F~140°F) |
| | Humidity | 15%~95% (No condensation) |
| Mounting | VESA FPM PMI | Yes (200 x 200 mm & 100 x 100 mm) |
| Dimensions | w/o base (W x H x D) | 727 x 425 x 64 mm (28.6" x 16.7" x 2.5") |
| | Packaging (W x H x D) | 818 x 547 x 139 mm (32.2" x 21.5" x 5.5") |
| Weight | w/o base | 5.2 kg (11.5 lbs) |
| | Packaging | 7.8 kg (17.2 lbs) |
| Regulation Approval | Certifications & Compliance | CB, CE, FCC, WEEE, RoHS, REACH |
| Accessories | Supplied | User manual CD, Remote control, Power cord, 15-Pin D-Sub cable, RS232 cable |

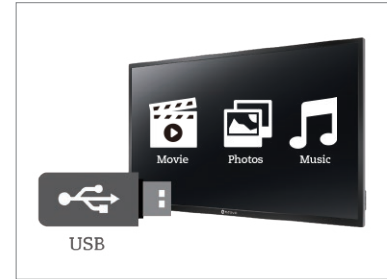

USB Playback for easy multimedia content presenting



Versatile connectivity: VGA, DVI, HDMI, Composite, Component



Built-in scheduler automatically activates and deactivates the PM-32 with designated input signal according to programmed schedules



RS-232/ RJ45/IR for remote control