

SPE-410

4CH Network Video Encoder




Key Features

- Max. 4MP resolution
- Max. 15fps@4MP, 30fps@1080p
- H.264, MJPEG-4 codec support
- Dual streaming (up to 3 profiles per CH)
- 10/100/1000 Base-T

Dimensions

Unit : mm (inch)

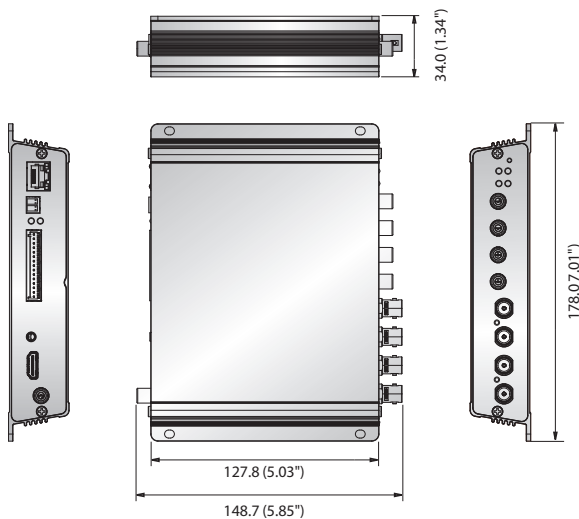

	SPE-410N	SPE-410P
VIDEO		
Input Channel	4CH BNC 1.0V pp / 75Ω composite NTSC	4CH BNC, 1.0V pp / 75Ω composite PAL
Input Signal & Resolution	CVBS, AHD(2&4MP), CVI(2MP), TVI(2MP) Auto / Manual detection	
Video Out	1 HDMI OUT (4 multi Image, 1920 x 1080)	
OPERATIONAL		
Motion Detection	Off / On	
Privacy Masking	Off / On (4ea rectangular zones)	
Alarm I/O	4 Input / 2 Output	
Alarm Trigger	Motion detection, Alarm input, Video loss, Tampering, Network disconnect	
Alarm Events	File upload via FTP, E-mail	
Audio I/O	4 Line input / 1 Line output	
Remote Control Interface	1ea RS-485 (Half duplex)	
RS-485 Protocol	SAMSUNG-T, PELCO-P/D	
Coaxial Control	NTSC/PAL : Pelco-C (Coaxitron), AHD : ACP (AHD Coax protocol)	
NETWORK		
Ethernet	1 RJ-45 (10/100/1000 BASE-T)	
Video Compression Format	H.264 (MPEG-4 Part 10/AVC) : Main / Baseline / High, JPEG	
Resolution	4M, 1920x1080, 1280x720, 928x480, 928x240, 704x480, 704x240, 352x240	4M, 1920x1080, 1280x720, 928x576, 928x288, 704x576, 704x288, 352x288
Max. Framerate	- Main Stream 4MP : 15fps/CH, 1080p/720p/ WD1/4CIF/CIF : 30fps/CH - Sub Stream WD1/4CIF : 12fps/CH, 2CIF/CIF/ QVGA/QCIF : 30fps/CH - MJPEG : 2fps @ 1920x1080, 1280x720, 960H, D1	- Main Stream 4MP : 15fps/CH, 1080p/720p/ WD1/4CIF/CIF : 25fps/CH - Sub Stream WD1/4CIF : 12fps/CH, 2CIF/CIF/ QVGA/QCIF : 25fps/CH - MJPEG : 2fps @ 1920x1080, 1280x720, 960H, D1
Bitrate Control Method	H.264 : CBR or VBR, MJPEG : CBR	
Streaming Capability	Dual streaming (Up to 3 Profiles per channel)	
Audio I/O	4 Line Input / 1 Line Output	
Audio Compression Format	G.711 u-law	
IP	IPv4, IPv6	
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, UPnP, ONVIF, Bonjour	
Security	HTTPS (SSL) login authentication, Digest login authentication IP address filtering, User access log, 802.1X authentication (EAP-TLS, EAP-LEAP)	
Streaming Method	Unicast / Multicast	
Max. User Access	10 users at Unicast Mode	
Webpage Languages	English, French, German, Spanish, Italian, Russian, Turkish, Polish, Dutch, Swedish, Portuguese, Czech, Chinese, Japanese	
Web Viewer	Supported OS : Windows 7, 8, 10, Mac OS X 10.10, 10.11, 10.12 - Non-plugin WebViewer Supported Browser : Google Chrome 54, MS Edge 38, IE11, Mozilla Firefox 49 (Windows 64bit only), Apple Safari 9 (Mac OS X only)	
Application Programming Interface	ONVIF profile S, SUNAPI (HTTP API)	
Compatible Software & Recorder	Smart viewer, SSM, Wisenet mobile viewer, NVR (Hanwha Techwin, P / X / Q series)	
ENVIRONMENTAL		
Operating Temperature / Humidity	-10°C ~ +50°C (+14°F ~ +122°F) / 20% ~ 80% RH	
ELECTRICAL		
Input Voltage / Current	12V DC, PoE(IEEE 802.3af)	
Power Consumption	Max. 9.6W (12V, 0.8A)	
MECHANICAL		
Color / Material	Dark Gray / Metal	
Dimensions (WxHxD)	178.0x 34.0 x 127.8.0mm (7.01" x 1.34" x 5.03")	
Weight	540g (1.19 lb)	

* The alarm feature of SSM or NVR (connected to encoder) is in preparation.
We will announce through our web site when it is available. Please find more information at hanwha-security.com
* Design and specifications are subject to change without notice.
* Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.